


UNDER BALLAST MATS

ELASTICITY
in Ballasted Track

**VIBRATION ISOLATION AND
PROTECTION OF THE ENTIRE
RAILWAY SUPERSTRUCTURE.**



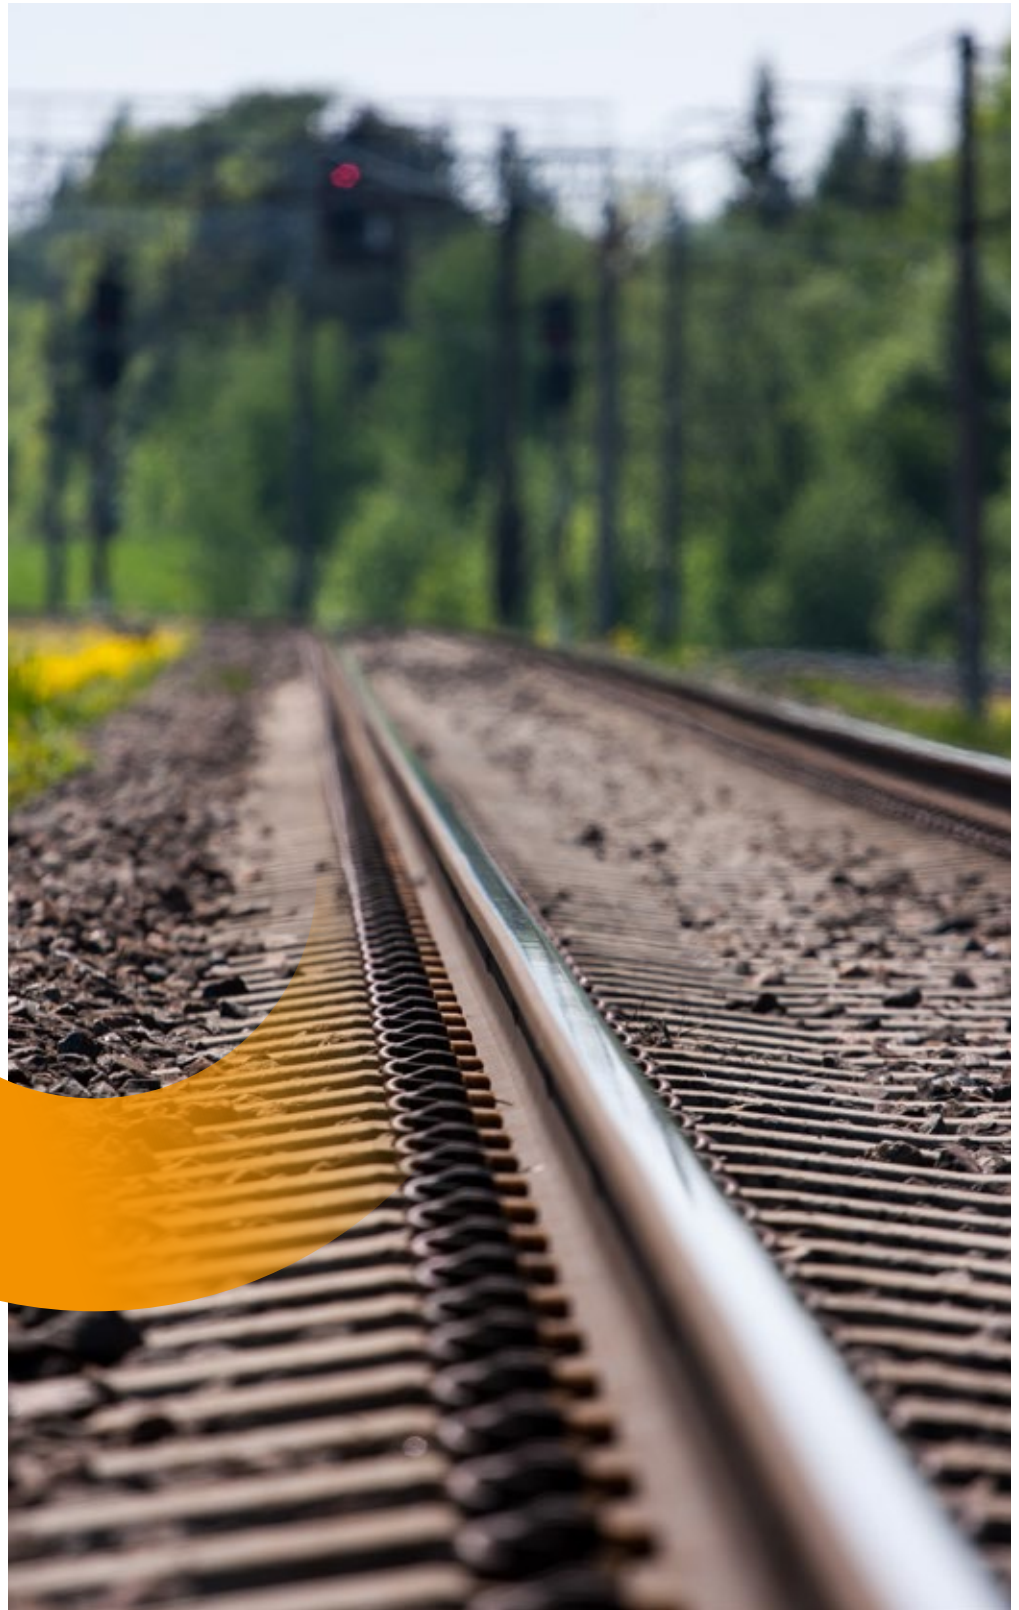

**EFFECTIVE VIBRATION
ISOLATION PROVIDES
SUSTAINABLE PROTECTION
AGAINST VIBRATIONS
AND NOISE.**

FUNCTIONAL PRINCIPLE

Under ballast mats made of the Getzner materials Sylomer® and Sylodyn® limit the static and dynamic forces exerted on the ballast bed by railway operations.



The most important applications are:

- Isolation of structure-borne noise on railway lines in densely populated regions: local transport railways and standard-gauge railways in the vicinity of buildings.
- Protection of structures and buildings sensitive to vibrations or with elevated vibration protection requirements such as concert halls, museums, hospitals, historic structures or vibration-sensitive laboratory, testing or measurement equipment.
- Reduction of the emission of secondary air-borne noise on bridge structures.
- Increased track geometry stability and reduction of ballast compression decrease the maintenance costs for heavily laden track sections.



[getzner.com/
under-ballast-mats](https://www.getzner.com/under-ballast-mats)

Getzner under ballast mats have a multi-layer structure:

Load distribution layer

The top layer of the mats consists of a geotextile or fleece with high stretch and tear resistance. This layer deforms under the load of the ballast. The ballast rocks are embedded and their positions are stabilized by the increased contact surface. Forces introduced to the mat are distributed over the full area and transmitted to the underlying resilient layers.

Resilient layer

The resilient layer consists of microcellular polyurethane materials. The materials are volume-compressible, meaning that no profiles or cavities are required for shaping. Depending on the mat type, the resilient layer is comprised of one or two layers, each with a density specifically selected to yield the desired overall static and dynamic stiffness.

ENGINEERING SERVICE



Getzner has developed a specialized computational model for the installation of under ballast mats that allows for reliable prediction of the achievable vibration reduction.

Multiple series of tests by various railway operators under a variety of test conditions have shown that Getzner's predictions correspond to the actual results. As part of Getzner's service to its customers, experts generate separate predictions for each application and mat type.

Additional examples of the comprehensive service offered by Getzner include the creation of CAD installation plans, specific calculation models for determining rail deflection, individual on-site construction support or installation instructions for the mats. The state-of-the-art testing laboratory helps make this possible.

In close cooperation with customers and various research and testing agencies, Getzner continuously modifies and tests its product selection. The engineers, product managers and physicists at Getzner are constantly focused on the rising expectations of the market and of customers.

Under ballast mats made of Sylomer® and Syldyn® have proven their quality on operational track sections many times over the past few decades.



Tests and measurements are available from the following institutes (excerpt):

Chair and Testing Institute for Construction of Transport Routes	Munich University of Technology
TÜV Rhineland	Cologne, Central Department of Vibration Technology and Vibration Protection
Deutsche Bahn	Testing Institute
Arsenal Research	Vienna
Müller BBM GmbH	Planegg near Munich
ISMES Spa	Bergamo, Italy
Institute for Road and Rail Transportation	Berlin University of Technology
Prof. Peter Steinhauser	Civil Engineer for Technical Physics, Vienna
Ruthishauser Engineering Office for Construction, Transportation and the Environment	Zurich
EMPA, Federal Materials Testing and Research Institute	Dübendorf
Fritsch, Chiari & Partner Ziviltechniker GmbH	Vienna

Research and test reports are available upon request.

TECHNICAL PRODUCT INFORMATION

Bedding modulus and static stiffness


The correct stiffness of a mat depends on the application, the superstructure design (ballast bed height, sleeper area and spacing, rail type) and the operating conditions (axle load, maximum speed).

The measure of stiffness is the bedding modulus, given in N/mm^2 . This value is largely responsible for determining the rail deflection during train passes. If the recommendations are observed, the rail deflection is generally less than 3 mm and less than 1.5 mm for high-speed traffic. Getzner determines the actual deflection in the individual case by calculating the bending line of the rails.

Effectiveness and insertion loss

The effectiveness of a under ballast mat can be seen in the form of a reduced structure-borne sound level.

This measure is referred to as "insertion loss" and is indicated as the difference of 1/3-octave levels (cumulative level within a 1/3-octave frequency band) as a function of the 1/3-octave band center frequency. The effectiveness is not determined solely by the under ballast mat; rather, it results from the characteristics of the entire system - from the vehicle to the substructure.

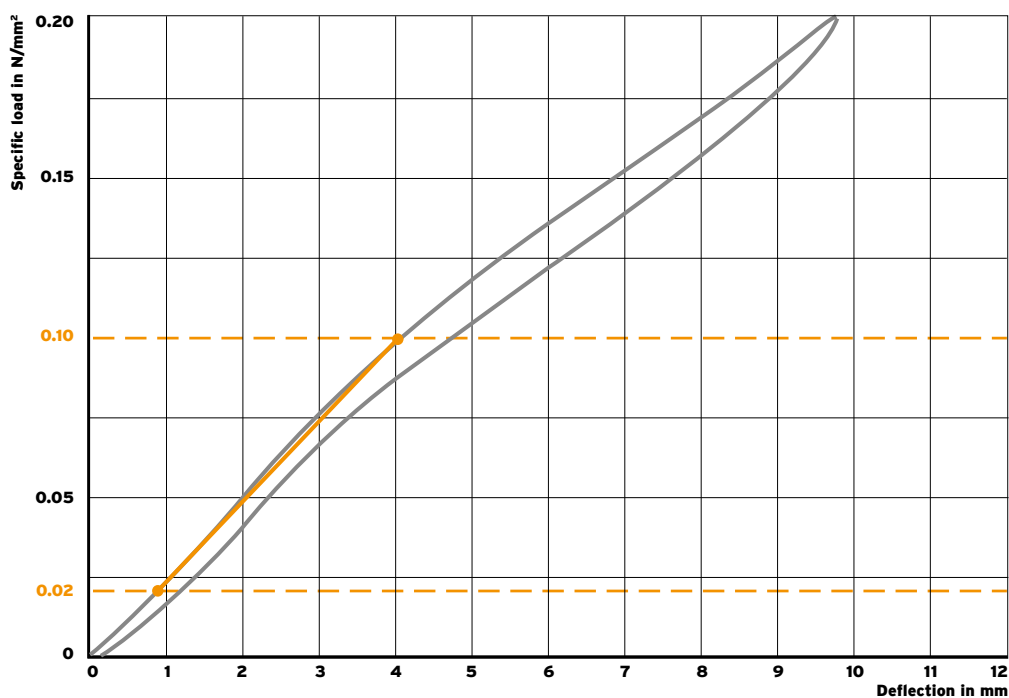

Spring load deflection curve for Syldyn® DN 335 under ballast mat

The following parameters are particularly important:

- Unsprung mass of the bogie
- Dynamic stiffness, damping and mass of the ballast superstructure excluding the mat
- Dynamic stiffness and damping of the mat (depends on load, frequency and amplitude)
- Vibration resistance (impedance) of the substructure

Prediction model


By considering the entire system and including the various structural factors, Getzner is able to apply a prediction model to calculate the effectiveness of a measure in advance.

The model assumes that the “dynamic stiffness” and the “loss factor” are sufficient for a nearly complete description of the dynamic properties of the under ballast mat in the relevant load and frequency range.

Getzner Under Ballast Mats satisfy this condition because the dynamic stiffness is only minimally dependent on frequency, load and amplitude. The under ballast mats are particularly effective in the frequency range corresponding to the wheel/rail superstructure resonance for a superstructure without mats. Depending on the bedding stiffness, this is between approx. 50 Hz and 80 Hz.


In most applications, the effectiveness in the frequency range under about 80 Hz is particularly important since these low-frequency vibrations are very strongly stimulated. Buildings and building elements can easily be stimulated within this frequency range, as can be seen in the natural vibration of ceilings and walls.

Due to the advanced technology of Getzner Under Ballast Mats, the values for their effectiveness based on experience and prediction models are not applicable to other types of under ballast mats (examples: compact elastomer mats with profiling or interior cavities).

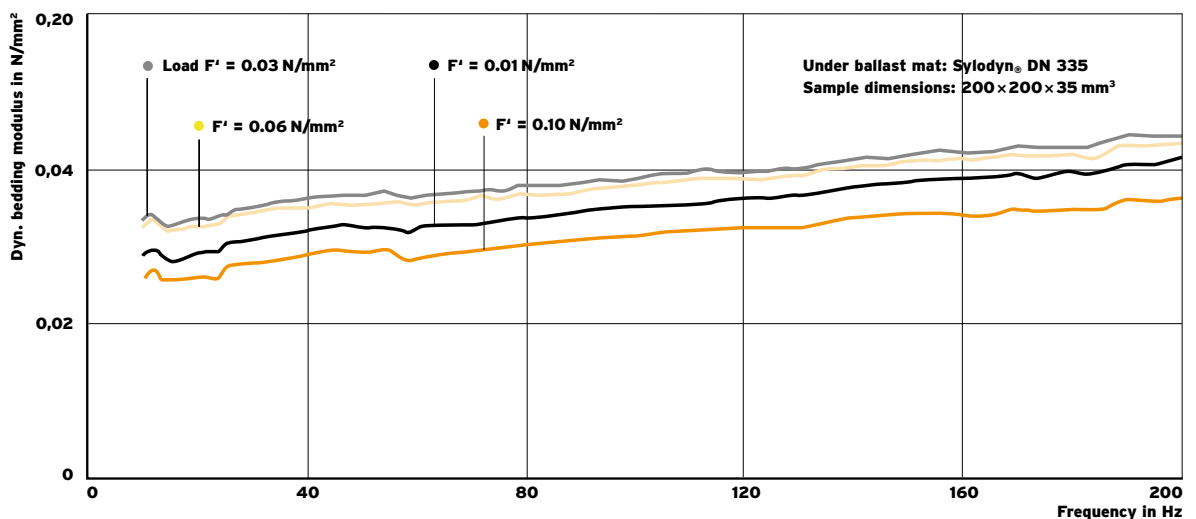

Load and frequency dependence of dynamic stiffness (from: Müller-BBM, Report No. 32242/12)

INSTALLATION TECHNOLOGY

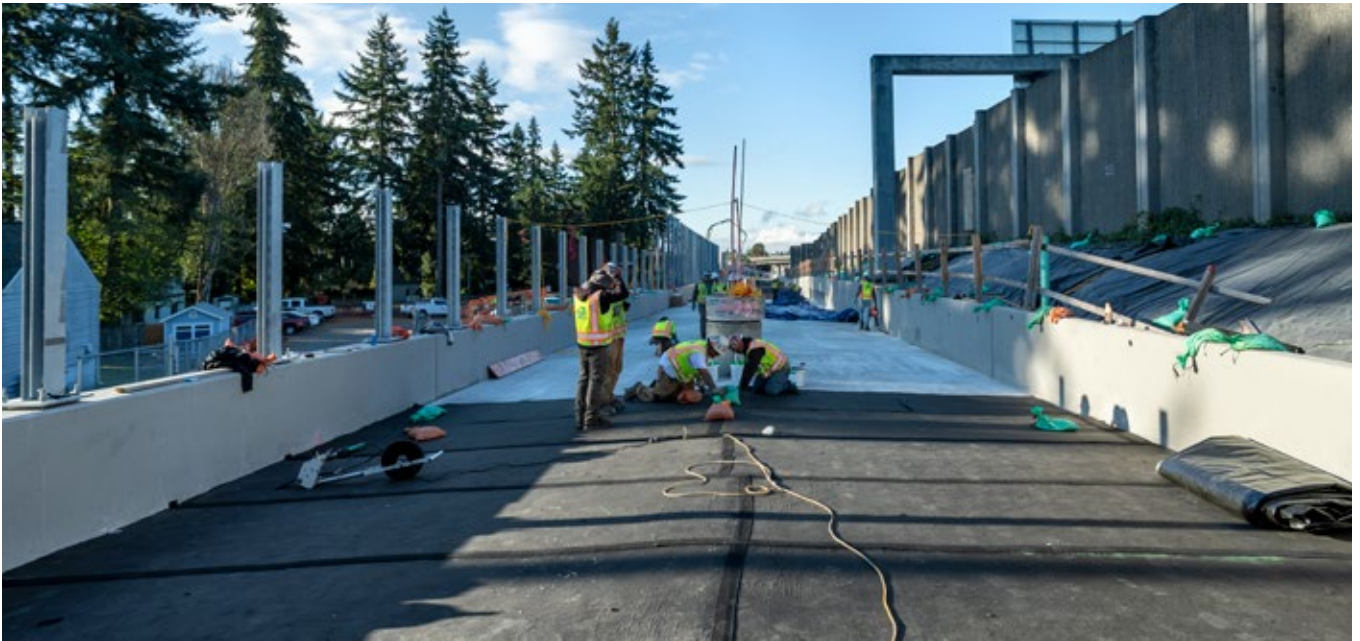

Delivery form and installation

Getzner manufactures Under Ballast Mats in a uniform width of 1.50 m. The mat sheets are cut to the local track width before leaving the factory.


After being cut to size, the mats are rolled up and packaged. After the installation position has been marked on the mat, it is delivered directly to the construction site. Starting from a mat thickness of 35 or 40 millimeters, it is sometimes useful to deliver the mats in two separately rolled layers to allow for easier handling.

The mat rolls are distributed and laid out at the destination site according to their labeling. Any fine adaptations necessary are performed by inserting fitting blocks or by cutting the mats to the correct size and shape, which may be necessary in the area of curves.

The continuous further development of installation techniques by Getzner has now made it possible to thermally glue the upper

layer of the individual mats and the fitting blocks together. The mat covering is fully functional immediately after laying - in other words, even without the mats being bonded to the subsoil.

Rubber-tired construction vehicles can drive over the mat covering with no problems. If the mats are not covered with ballast immediately after laying, it is useful to secure the position of the mats through partial bonding with the subsoil (construction site traffic, incoming water). Getzner uses solvent-free adhesive, such as 2-component PU adhesives, for this task. The bonding takes place so that any water that may have penetrated under the mats can flow or seep to the next drain inlet.

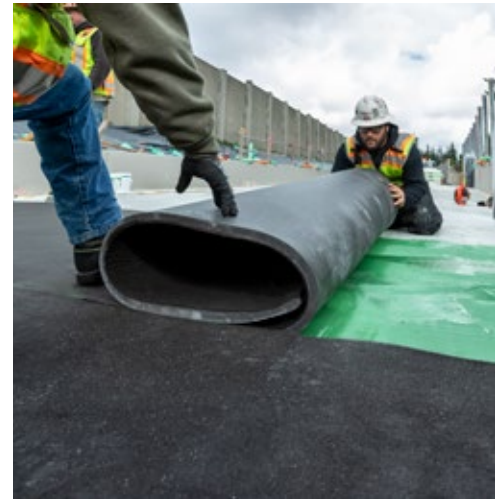

Requirements for the subsoil


Getzner Under Ballast Mats lie on the subsoil with full surface contact. Because they are flexible and elastic in all directions, they largely adapt to the contour of the subsoil.

Since the mat optimally adapts to the subsoil beneath, sharp-edged recesses or bumps in the laying surface can damage the mats. Concrete decking must first be scraped or smoothed to an approximate evenness. No special measures are required for laying Getzner Under Ballast Mats on subsoil of compressed gravel (sub-grade), on a cement-paved support layer or on a bitumen support layer.

When existing track sections are retrofitted with mats, the laying surface frequently consists of old ballast. In this case, it has proven effective to provide a load distribution layer on both sides of the mat.

If the mats are subject to constant and extensive water exposure, drainage mats can be laid under the mats in a linear arrangement. To avoid sound bridges in the area of the water channels, the grills or grates are covered with perforated under ballast mats; however, these can also be elastically supported themselves.

The Getzner Under Ballast Mats delivery program naturally also includes detailed, written installation instructions as well as the adhesive required for laying. If the laying surface is coated with plastic (e.g. epoxy resin for steel bridges), no special measures are required. Sylomer® and Sylodyn® are free of softening agents and other oils. If the under ballast mats are to be bonded, the subsoil must first be dry and swept clean.

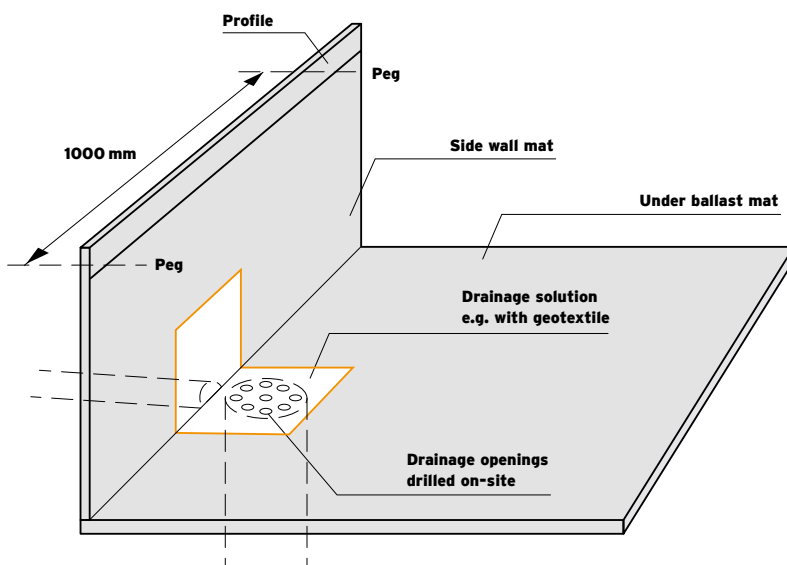

Drainage principle: Sylomer® and Sylodyn® under ballast mats

RETROFITTING EXISTING TRACK SECTIONS



Getzner Under Ballast Mats are particularly valued in many retrofitting projects due to their low weight and easy installation.

Under ballast mats made of Sylomer® and Sylodyn® have also proven themselves well in sensitive areas with the highest requirements for vibration protection as well as under extreme structural conditions.

The retrofitting procedure from Getzner has been tested frequently in practice and ensures rapid construction progress. Because it is not necessary to remove the entire track panel, only short track closure times are required for the installation. Since it is not possible to adapt the size of the mats in advance, they must be cut on-site to the exact lengths required. They can be cut with simple, widely available carpet cutters.

If the signs of wear on the superstructure are not too extreme after years of operational loads without under ballast mats, it is naturally possible to reinstall all components. Rails, sleepers, rail fastenings and ballast do not have to be replaced, as is the case for other vibration-related refurbishment measures. Getzner trumps with economy and efficiency.

LONG-TERM BEHAVIOR UNDER THE HARSHTEST CONDITIONS



Tunnel Gasteig, Munich

Getzner Under Ballast Mats exhibit extremely high effectiveness even after years of exposure to operational loads. This has been proven by a study evaluating the long-term properties of Getzner Under Ballast Mats.

After more than 30 years of operation and a daily load of roughly 150,000 tons, samples were removed from the superstructure and subjected to various tests. The test results showed that the under ballast mats still exhibited outstanding functionality. Despite more than 30 years of use, the under ballast mats from Getzner still had an impressive, constant stiffness behavior. In verification measurements on samples that had lain in silty subsoil for over 30 years, no contamination was found inside the mats.


Getzner Under Ballast Mats retain their function even under extreme conditions. Environmental influences such as complete flooding, frost or heavy soiling of the ballast bed with sand or material worn away from the ballast rocks cannot affect the mats.



[getzner.com/
gasteig-munich](https://www.getzner.com/gasteig-munich)

» **“... The Sylomer® B 851 under ballast mat superbly withstood the extremely high operating loads totalling over 760 million tons within a period of more than 16 years.”**

Quote from the test report by an external testing institute

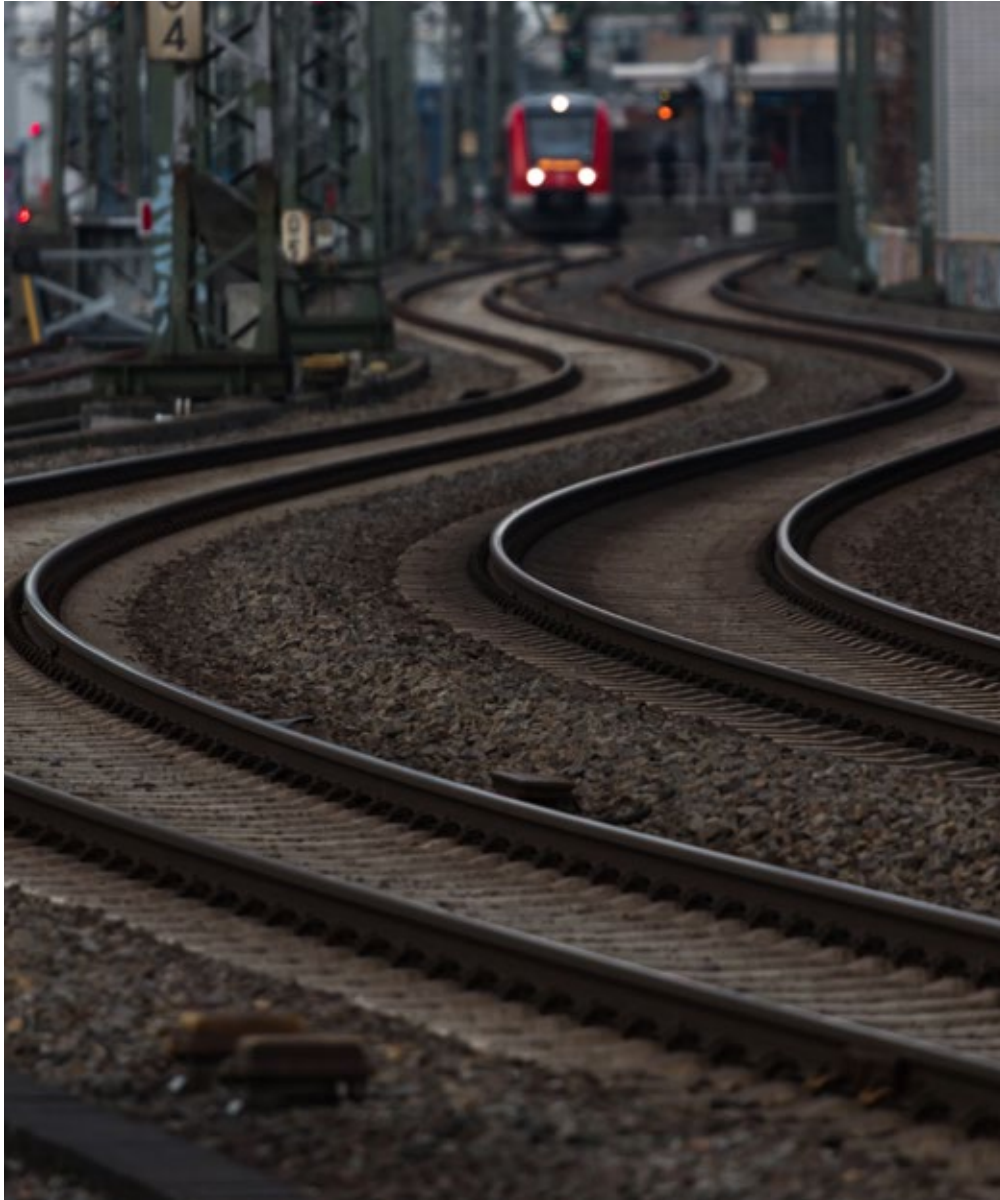

**Reduction
of vibrations**



**Lowered
noise levels**



**Less wear and
maintenance**



**Longer service
life of bedded
components**

ENGINEERING A QUIET FUTURE

We are proud to be the leading global expert
in vibration isolation and protection for the
railway, construction and industry sectors.

getzner.com

Getzner Werkstoffe GmbH

Herrenau 5
6706 Bürs, Austria
T +43-5552-201-0
info.buers@getzner.com