

CR 108 Roll

Premium Cork Underlay

Ideal for laminate flooring



Shape Roll


Dimensions 1m x 10m 40" x 33'

Thickness 2mm - 10mm 5/64" - 25/64"

10 M²

Description Agglomerated Composition Cork produced with pure 100% natural granulated cork and a polyurethane binder

Specific Weight	145-220 kg/m ³	ISO 7322
Tensile Strength	≥ 200 kPa	ISO 7322
Compression	20% - 50%	ISO 7322
Recovery	≥ 70%	ISO 7322
Noise Reduction	Up to 20 dB	ISO 140 & 717
Thermal Conductivity	0.038 W/m ² K	ISO 8301
Thermal Resistance	0.053 M ₂ °K/W	ISO 7322

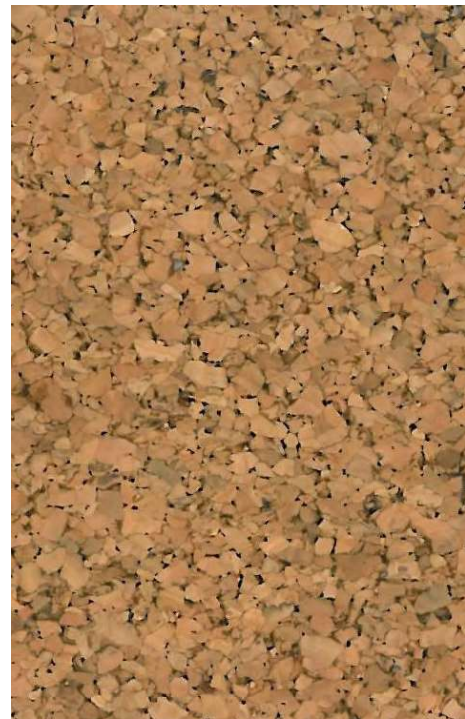

Thermal Insulator



Resilience, Compressibility and Recovery



Hypoallergenic



Excellent Acoustic Insulation



Walking Comfort



Easy to Maintain



100% Natural, Reusable and Recyclable



Resistance and Flexibility