


Tubolit[®] AR

Fonoblok

THE NOISE REDUCING INSULATION FOR
CAST IRON WASTE WATER PIPES

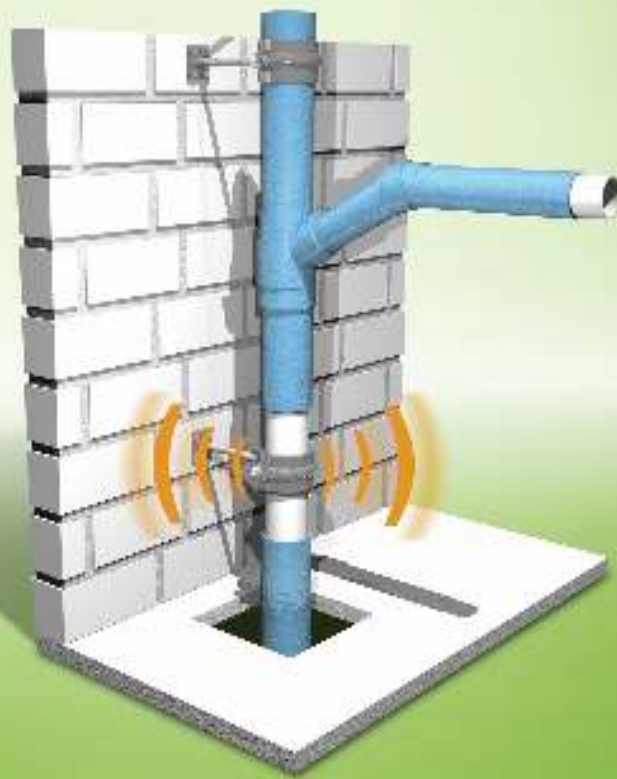

- Improved acoustic comfort
- Easy application over flanges and elbows
- < 15db(A) on cast iron pipes

Technical Data - Tubolit AR Fonoblok

Brief description	Flexible, closed-cell extruded insulation material to reduce noise and prevent condensation especially on cast iron pipes for waste water, rain water and sewage pipes.
Material type	Foam material based on polyethylene. Factory made polyethylene foam (PEF) according to EN 14313.
Colour	blue
Material Special Information	Self-adhesive coating on tapes: pressure-sensitive adhesive coating on modified acrylate basis with mesh structure, covered with polyethylene foil.
Applications	Acoustical and thermal insulation of internal waste water, rain water and sewage pipes in residential and non-residential buildings. For complex and large diameter rain collecting and (roof-) drainage pipes, to provide optimal protection against the risk of condensation, we recommend using Armaflex insulation.
Remarks	EC Certificate of Constancy of Performance no. 0551 and 0543 (tape) of Güteschutzgemeinschaft Hartschaum (GSH) e.V. , Celle

Property	Value/Assessment	Test ¹	Super- vision ²	Special Remark
Temperature Range				
Temperature Range	max. service temperature + 100 °C (+ 85 °C for tapes) min. service temperature (as is usual in plumbing installations)	EU 5677	o/●	Tested acc. to EN 14707 and EN 14313
Thermal Conductivity				
Thermal Conductivity ¹	ϑ_m 40 [°C] $\lambda =$	EU 5677	o/●	Declared acc. to EN ISO 13787 Tested acc. to EN ISO 8497
	Tubolit AR Fonoblok $\lambda \leq 0,045$ W/(m · K) $[41 + 0,1 \cdot \vartheta_m + 0,0008 \cdot (\vartheta_m - 40)^2] / 1000$			
	Tubolit AR tape $\lambda \leq 0,045$ W/(m · K) $[41 + 0,1 \cdot \vartheta_m + 0,0008 \cdot (\vartheta_m - 40)^2] / 1000$			
Fire performance				
Reaction to fire ²	Tubolit AR Fonoblok E Tubolit AR tape E	EU 5677	o/●	Classified acc. to EN 13501-1 Tested acc. to EN ISO 11925-2
Acoustic Performance				
Reduction of structure-borne sound transmission	on cast-iron waste water pipes ≤ 15 dB(A)	D 2144		Tested acc. to EN 14366
Other technical features				
Dimensions and tolerances	In accordance with EN 14313, table 1 and 2	EU 5677	o	Tested acc. to EN 822 EN 823 EN 13467
Storage & Shelf life	Tapes self-adhesive: 1 year			Can be stored in dry, clean rooms at normal relative humidity (50% to 70%) and ambient temperature (0 °C – 35 °C).

1. Due to testing method and laboratory equipment, thermal conductivity is measured for Tubolit DG, S and DHS in a regular way

2. The reaction to fire classification is valid on metal surfaces.

*1 Further documents such as test certificates, approvals and the like can be requested using the registration number given.

*2 ●: Official supervision by independent institutes and /or test authorities

o: Own in-factory quality monitoring

All data and technical information are based on results achieved under typical application conditions. Recipients of this information should, in their own interest and responsibility, clarify with us in due time whether or not the data and information apply to the intended application area. During storage of the product blooming on the surfaces may occur, especially at wall thickness below 19mm. This blooming does not affect the technical properties of the material, but can affect the adhesion properties. Therefore, the surface needs to be cleaned (wiped off) before adhesives can be applied.

Tubolit AR Fonoblok tubes endless



Length 15,0 m, Thickness 5,0 mm, Color blue

Pipe max. Outside-Ø [mm]	5,0 mm insulation thickness					
	Outer- Ø [mm]	Nominal width DN	Code	m/carton	Rolls/carton	€/m
57	58	50	TL-50/5-AR	135	9	xxx
64	63	60	TL-60/5-AR	120	8	xxx
76	78	70	TL-70/5-AR	105	7	xxx
89	90	90	TL-90/5-AR	75	5	xxx
108	110	100	TL-100/5-AR	75	5	xxx
133	135	125	TL-125/5-AR	60	4	xxx
160	160	150	TL-150/5-AR	45	3	xxx

Tubolit AR Fonoblok tapes self-adhesive



Color blue, Material from high quality polyethelene

Code	Width [mm]	Length [m]	Thickness [mm]	Rolls/carton	€/roll
TL-TAPE/50-AR	50,0	15	3	12	xxx
TL-TAPE/100-AR ●	100,0	15	3	6	xxx

● Item not in stock. Delivery on request. [MTO]

