
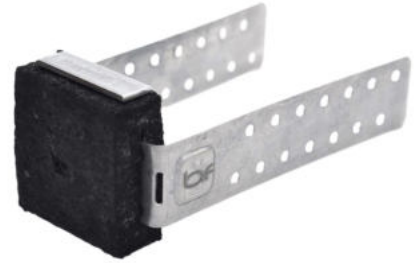


BAF IZOAGRAF03 (DUVAR/WALL)

BAF IZOAGRAF 03 (DUVAR), geri dönüştürülmüş kauçuk esaslı DAMTEC VIBRA MEDIUM malzemesinden üretilmiş, giydirme duvar imalatlarında çelik konstrüksiyon ile diğer yapı elemanları arasındaki titreşim iletimini engellemek için kullanılan titreşim sönümleyici duvar elemanlarıdır.

BAF IZOAGRAF 03 (DUVAR), içerdiği geri dönüştürülmüş kauçuk esaslı DAMTEC VIBRA MEDIUM malzeme nedeniyle yüksek performanslı bir üründür. Ürün standart olarak galvaniz profil ile birlikte kullanılmak için üretilmiştir ancak kutu profil ile birlikte de kullanılabilir.

BAF IZOAGRAF 03 (DUVAR), ürünü, duvarda 60x120 cm'de bir (m2'de yaklaşık 1,5 adet) kullanılması önerilmekle beraber, statik olarak uygun olduğu takdirde daha geniş aks aralıklarıyla da kullanılabilir.

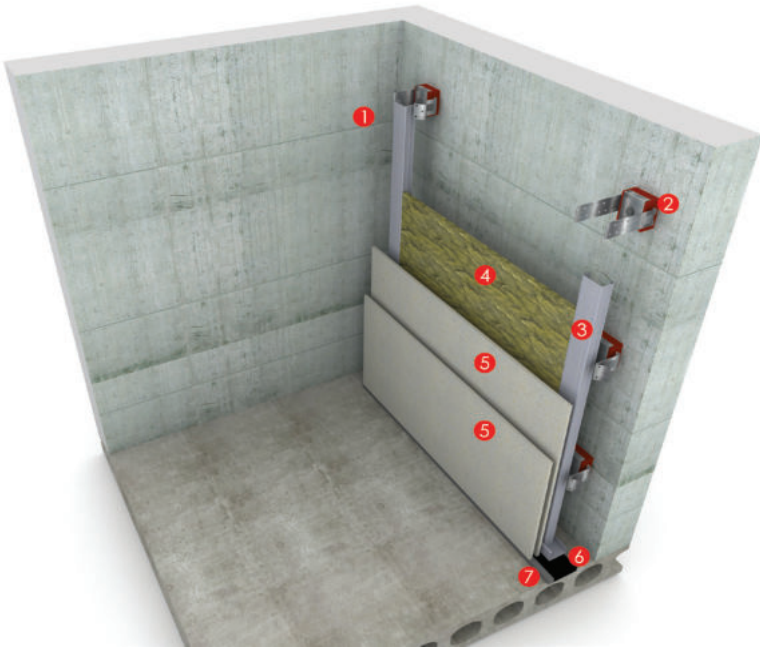

BAF IZOAGRAF 03 (DUVAR)
BAF IZOAGRAF 03 (WALL)

- 1- MEVCUT DUVAR / EXISTING WALL
- 2- BAF IZOAGRAF 03
- 3- GALVANİZ PROFİL / GALVANIZED PROFILE
- 4- TAŞ YÜNÜ / ROCKWOOL
- 5- ALÇI PLAKA / GYPSUM BOARD
- 6- BAF KAUÇUK STRİP / BAF RUBBER STRIP
- 7- BAF AKUSTİK MASTİK / ACOUSTIC SEALANT

BAF IZOAGRAF 03 (WALL) is vibration isolation wall mount that made of DAMTEC VIBRA MEDIUM recycled rubber material which is used to prevent vibration transmission from steel construction to other structural components.

BAF IZOAGRAF 03 (WALL) is a high performance product thanks to DAMTEC VIBRA MEDIUM recycled rubber material. The product is designed to use with metal stud profiles but it is also compatible with hollow section profiles.

BAF IZOAGRAF 03 (WALL) is recommended to use with 60x120 cm distance (1,5 pieces per m2) on the wall but the distance between mounts can be increased if statically approved.

Daha fazla bilgi ve numune talepleriniz için lütfen irtibata geçiniz.
For more details, please contact with us from contact informations below.

BAF IZOAGRAF03 (DUVAR/WALL)



DAMTEC® vibra medium is a mat of rubber granulates for the absorption of vibrations as well as for impact sound insulation. It has unique compression recovery capability and has exceptionally resilient characteristics. The ideal area of application is for a material pressing between 0.10 N/mm² and 0.20 N/mm².

Product design

Material: Fine granules of recycled rubber foam with PU elastomer bonding agent

Colour sample:



Colour: anthracite or anthracite/multicolour

Surface: closed, smooth

Dimensions / Tolerances / Weight

Roll width: 1,250 mm (± 1.5 %)

Roll length: 8 m / 6 m / 1 m (± 1.5 %)

Thickness: 5 mm / 10 mm / 12.5/15/20 mm (± 1 mm)

Daha fazla bilgi ve numune talepleriniz için lütfen irtibata geçiniz.
For more details, please contact with us from contact informations below.



BAF IZOAGRAF03 (DUVAR/WALL)



Product Testing

Test Institutes:	Technical University Dresden, Institute for solid mechanics, test report No.13/09, 09/06/09
Tensile strength:	0.2- 0.6 N/mm ² (ISO 1798)
Elongation at break:	40 -80% (ISO 1798)
Density:	400 - 550 kg/m ³
Temperature range:	-30° to 80°C
Flammability rating:	E _{fl} (ISO 11925/EN 13501)
Maximum pressure:	$\sigma_{max} = 0.20$ N/mm ² (EN 826)
Short peaks:	approx. 60% deflection at 0.7N/mm ²

Installation

Installation is to be carried out in accordance with the DAMTEC® vibra installation instructions.

Daha fazla bilgi ve numune talepleriniz için lütfen irtibata geçiniz.
For more details, please contact with us from contact informations below.

